

IZTISNJENE PALICE T66




Dolžina palic: 6 m

Certifikat: EN 10204/3.1

EXTRUDED T66

Length: 6 m

Certificate: EN 10204/3.1

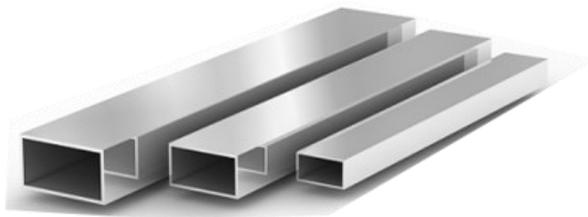

DIMENZIJE		DEBELINA V MM - TICHNESS IN MM					
Dimensions		1,5	2	2,5	3	4	5
A MM	B MM						
20	10	0,219	0,286				
	15		0,335				
25	15	0,3	0,389				
	20		0,442				
30	10	0,3	0,389				
	15	0,340	0,443				
	20	0,381	0,497		0,713		
35	25		0,551				
	20		0,551				
	25		0,605				
40	10		0,498				
	15		0,551				
	20		0,605		0,875	1,123	
45	25		0,659				
	30		0,710		1,037	1,339	
	20		0,659				
50	25			0,713			
	15		0,659				
	20		0,713		1,030	1,339	
60	25		0,770		1,118		
	30			0,821		1,20	
	40		0,930		1,361	1,777	
70	20		0,821		1,2	1,555	
	25		0,875		1,28		
	30		0,930		1,361	1,771	
	40		1,037	1,283	1,523	1,99	2,43
70	50				1,685		
	20		0,929				
	30				1,523		
	40				1,685		

DIMENZIJE		DEBELINA V MM - THICKNESS IN MM					
Dimensions		1,5	2	2,5	3	4	5
A MM	B MM						
80	20		1,037				
	30		1,145		1,684		
	40		1,253		1,847	2,419	
	50		1,360		2,009	2,635	
	60				2,171	2,851	
100	18		1,231				
	20		1,253				
	25		1,307				
	30		1,360		2,01		
	40		1,469		2,171	2,85	
	50		1,577		2,333	3,067	3,780
	60		1,685		2,495	3,283	
	80				2,189		
120	20		1,47				
	30		1,577		2,333		
	40		1,685			3,283	
	50				2,657	3,497	
	60				2,82	3,715	4,590
	80				3,142		
140	18		1,663				
	20				2,495		
	40				2,819	3,715	
	60					4,147	
	80					4,577	
150	40					3,931	
	50		2,117		3,14	4,150	5,130
	60				3,305		
	80					4,8	
160	100				3,953		
	80					5,010	
180	40					4,579	
	50					4,795	
	60				3,791		
200	18		2,311				
	20		2,333				
	50					5,3	
	80					5,875	
206	100					6,307	
	30				3,726		