


HLADNO VALJANA PLOČEVINA

Debelina: 0,4 - 8,0 mm
EN 10088-2 (DIN 17441)
Certifikat: EN 10204/3.1

TOPLO VALJANA PLOČEVINA

Debelina: 3,0 - 130,0 mm
EN 10088-2/EN 10095/EN 10028-7 (DIN 17440/
DIN 17441, DIN 17460)
Certifikat: EN 10204/3.1

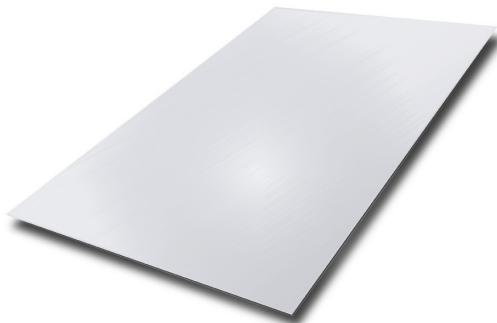

COLD ROLLED

Thickness: 0,4 - 8,0 mm
EN 10088-2 (DIN 17441)
Certificate: EN 10204/3.1

HOT ROLLED

Thickness: 3.0 - 130,0 mm
EN 10088-2/EN 10095/EN 10028-7 (DIN
17440/DIN 17441, DIN 17460)
Certificate: EN 10204/3.1

TEORETIČNE TEŽE NERJAVEČIH PLOŠČ - THEORETICAL WEIGHTS OF STAINLESS STEEL PLATES

DEBELINA	1 m2	1000x2000	1000x3000	1000x4000	1250x2500	1250x3000	1250x4000	1500x3000	1500x4000	1500x6000	2000x4000	2000x6000
Thickness												
0,4	3,2	6,4	9,6	12,8	10	12	16					
0,5	4	8	12	16	12,5	15	20					
0,6	4,8	9,6	14,4	19,2	15	18	24					
0,7	5,6	11,2	16,8	22,4	17,5	21	28					
0,8	6,4	12,8	19,2	25,6	20	24	32	28,8	38,4	57,6		
1	8	16	24	32	25	30	40	36	48	72		
1,2	9,6	19,2	28,8	38,4	30	36	48	43,2	57,6	86,4	76,8	115,2
1,5	12	24	36	48	37,5	45	60	54	72	108	96	144
2	16	32	48	64	50	60	80	72	96	144	128	192
2,5	20	40	60	80	62,5	75	100	90	120	180	160	240
3	24	48	72	96	75	90	120	108	144	216	192	288
4	32	64	96	128	100	120	160	144	192	288	256	384
5	40	80	120	160	125	150	200	180	240	360	320	480
6	48	96	144	192	150	180	240	216	288	432	384	576
8	64	128	192	256	200	240	320	288	384	576	512	768
10	80	160	240	320	250	300	400	360	480	720	640	960
12	96	192	288	384	300	360	480	432	576	864	768	1152
15	120	240	360	480	375	450	600	540	720	1080	960	1440
20	160	320	480	640	500	600	800	720	960	1440	1280	1920
25	200	400	600	800	625	750	1000	900	1200	1800	1600	2400
30	240	480	720	960	750	900	1200	1080	1440	2160	1920	2880