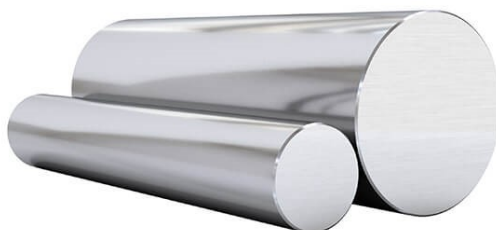


**TOPLO VALJANO - LUŠČENO**

Premer:  $\varnothing$ 25 do  $\varnothing$ 500 mm  
 Dolžina palic: Cca. 4 – 6 m  
 Toleranca: k11, k12, k13 - EN 10060 (DIN 1013)  
 Certifikat: EN 10204/3.1

**SVETLO VLEČENO**

Premer:  $\varnothing$ 3 do  $\varnothing$ 100 mm  
 Dolžina palic: Cca. 3 m  
 Toleranca: h9 EN 10278 (DIN 671)  
 Certifikat: EN 10204/3.1


**HOT ROLED - PEELED**

Dimensions:  $\varnothing$ 25 to  $\varnothing$ 500 mm  
 Bar length: Cca. 4 – 6 m  
 Tolerance: k11, k12, k13 - EN 10060 (DIN 1013)  
 Certificate: EN 10204/3.1

**COLD DRAWN**

Dimensions:  $\varnothing$ 3 to  $\varnothing$ 100 mm  
 Bar length: Cca. 3 m  
 Tolerance: h9 EN 10278 (DIN 671)  
 Certificate: EN 10204/3.1

DIMENZIJE DIMENSIONS	KG/M KG/M	DIMENZIJE DIMENSIONS	KG/M KG/M	DIMENZIJE DIMENSIONS	KG/M KG/M	DIMENZIJE DIMENSIONS	KG/M KG/M
3	0,06	30	5,55	130	104	265	433
4	0,10	32	6,31	135	112	270	450
5	0,15	34	7,13	140	121	275	466
6	0,22	35	7,55	145	129,7	280	483
7	0,30	36	7,99	150	139	285	501
8	0,39	38	8,90	155	148	290	519
9	0,50	40	9,87	160	158	295	537
10	0,62	42	10,88	165	168	300	555
11	0,75	45	12,49	170	178	305	574
12	0,89	48	14,21	180	200	310	593
13	1,04	50	15,41	185	211	320	630
14	1,21	55	18,65	190	223	325	660
15	1,39	60	22,20	195	235	350	765
16	1,58	65	26,05	200	247	380	907
17	1,78	70	30,21	205	259	400	1005
18	2	75	34,58	210	272	450	1273
19	2,23	80	39,46	215	285	500	1570
20	2,47	85	44,55	220	298		
21	2,72	90	49,94	225	312		
22	2,98	95	55,64	230	326		
23	3,26	100	61,65	235	340		
24	3,55	105	68	240	355		
25	3,85	110	75	245	370		
26	4,17	115	82	250	385		
27	4,50	120	89	255	401		
28	4,83	125	96	260	416		